

Spacing Guides

24" centres – non-staggered

This spacing is ideal for installations where you want the bikes to all be at the same height and you have plenty of available wall space or you are able to install frame systems or posts to attach the racks to.


Spacing Distances

We recommend a minimum spacing of 24" when the racks are all at the same height. This allows for users to easily access their bikes stored amongst others at the same height.

Mounting Height

Bicycles come in a huge variety of different length wheel bases. For example Road Bikes typically come in small, medium and large, with the length of a large road bike being 67" This spacing guide assumes the longest types of bikes will be able to be parked. It's advisable the Steadyracks can accommodate the largest bikes to ensure all facility users can mount their bikes. However, you can mount the racks lower if you choose to accommodate smaller bikes.

The below diagram is a one-size fits all approach and is a guide only. Please check your local regulations for bike parking facilities to ensure you comply. We're happy to work with you to make installation in your space as efficient as possible. To discuss how we can help you with your bike parking plans, contact us at sales@steadyrack.com.

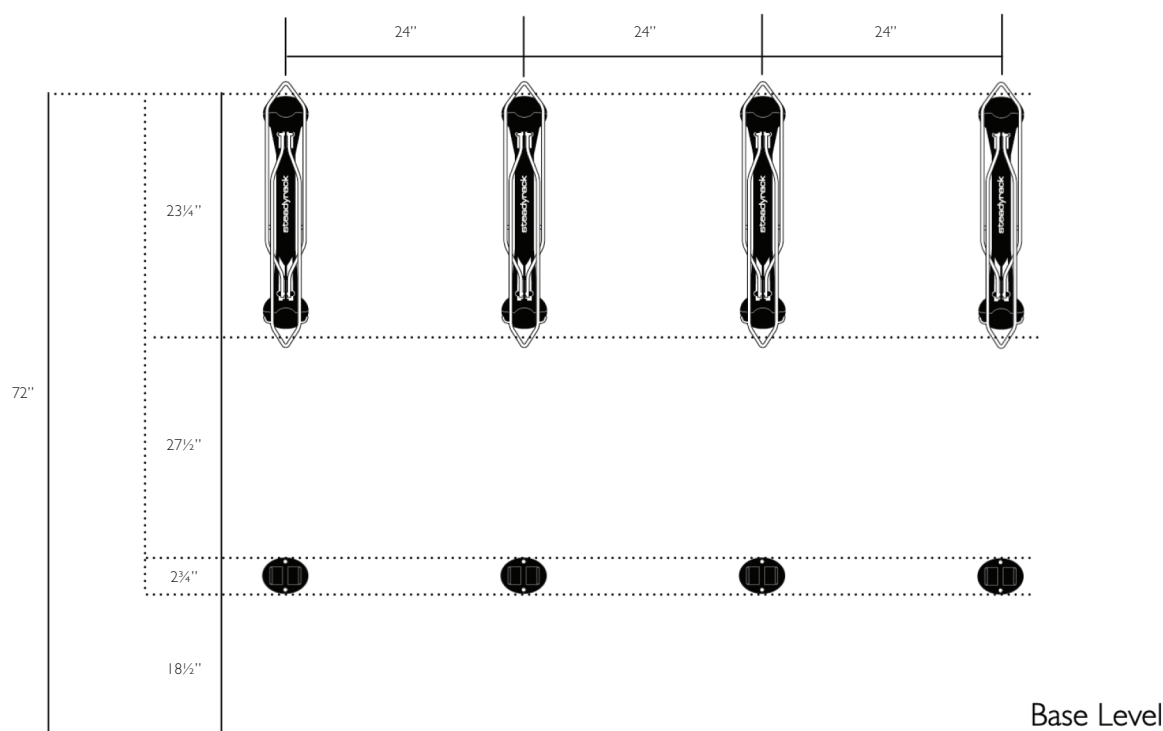

Base Level

